

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 January 2006 (12.01.2006)

PCT

(10) International Publication Number
WO 2006/004317 A1

(51) International Patent Classification: ⁷ D06F 37/28, 39/14

(21) International Application Number:
PCT/KR2005/001431

(22) International Filing Date: 17 May 2005 (17.05.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10-2004-0036066 20 May 2004 (20.05.2004) KR
10-2004-0036067 20 May 2004 (20.05.2004) KR

(71) Applicant (for all designated States except US): LG ELECTRONICS INC. [KR/KR]; 20, Yoido-dong, Youngdungpo-gu, Seoul 150-721 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): AHN, In Geun [KR/KR]; Hanlim Prugio 104-601, Sungjoo-dong, Changwon-si, Gyeongsangnam-do 641-120 (KR). LIM, Min Kyu [KR/KR]; Woosung APT., 101-705, Poongho-dong, Jinhae-si, Gyeongsangnam-do 645-750 (KR).

(74) Agents: BAHNG, Hae Cheol et al.; KBK & Associates, 15th Floor, Yo Sam Building, 648-23 Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: DOOR LOCKING SWITCH OF WASHING MACHINE AND METHOD THEREOF

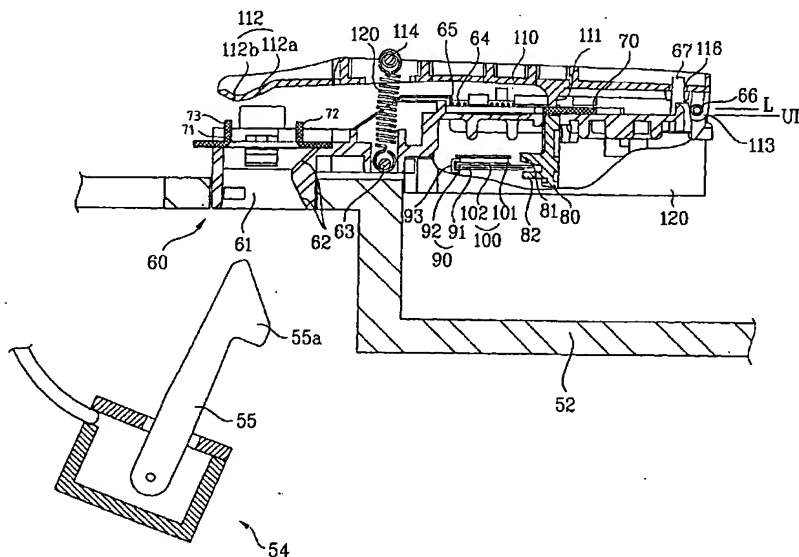

(57) Abstract: Door lock switch (50) of washing apparatus, and method for controlling the same, the door lock switch (50) for locking or unlocking a door (54), and cutting off a current applied to electric driving units under operation when the door (54) is opened forcibly, thereby controlling electric driving units under operation effectively for improving operation efficiency and safety of the washing apparatus when the door (54) is opened forcibly.

WO 2006/004317 A1

WO 2006/004317 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DOOR LOCKING SWITCH OF WASHING MACHINE AND METHOD THEREOF

[Technical Field]

The present invention relates to a door lock switch of a washing apparatus, and a
5 method for controlling the same, and more particularly, to a door lock switch of a washing
apparatus, and a method for controlling the same, in which electric driving units under
operation are controlled effectively when a door is forcibly opened, for improving
operation efficiency and safety of the washing apparatus.

[Background Art]

10 The washing apparatus washes laundry through steps of washing, rinsing, and
spinning to remove dirt from clothes and beddings in a drum by actions of water and
detergent supplied to a tub.

In general, the washing apparatus washes laundry through steps of washing,
rinsing, and spinning to remove dirt from clothes and beddings (hereafter called as 'cloth')
15 by actions of water having detergent dissolved therein or clean water (hereafter called as
'washing water').

FIG. 1 illustrates a perspective view of a related art washing machine, and FIG. 2
illustrates a block diagram of a related art washing machine control.

Referring to FIGS. 1 and 2, the related art washing machine is provided with a
20 body 2 having an opening for introduction/taking out laundry therethrough, a tub (not
shown) supported on an inside of the body 2, a drum 10 rotatably mounted on an inside of

the tub, a motor 12 for rotating the drum 10, a water supplying unit 14 for supplying washing water to the tub, and a drain unit 16 for draining the washing water from the tub.

The related art washing machine is also provided with a door 4 for opening/closing the opening, and a door lock switch 6 for locking/unlocking of the door 4.

5 The door 4 has a hook 5, so that the door closes/opens the opening as the hook 5 is locked or unlocked by the door lock switch 6.

Meanwhile, there can be a case when the door 4 is forcibly opened in the middle of washing, rinsing, or spinning of the laundry.

In this instance, for effective control of the washing apparatus, and the safety of a
10 user, detection of the forced opening of the door 4 and subsequent appropriate control of the electric driving units, such as the motor under operation, or a water supply valve, are required.

However, the related art washing apparatus requires a door sensing switch (not shown) in addition to the door lock switch 6 for sensing the forced opening of the door 4 in
15 the middle of washing, rinsing, or spinning of the laundry.

That is, the additional door sensing switch leads the washing apparatus complicate, to increase assembly man-hours, and a production cost.

Moreover, even if the door sensing switch is provided additionally, control of the electric driving units according to a state of sensing at the door sensing switch is very
20 complicate and inefficient.

[Disclosure]

[Technical Problem]

The object of the present invention is to provide a door lock switch of a washing apparatus, and a method for controlling the same, in which a door lock switch which locks or unlocks a door senses forced opening of the door directly, to cut off a current to electric driving units under operation, for simplifying a structure of the washing apparatus, and improving operation efficiency, and safety of the washing apparatus.

[Technical Solution]

The object of the present invention can be achieved by providing a door lock switch for locking or unlocking a door, and cutting off a current applied to electric driving units under operation when the door is opened forcibly.

In another aspect of the present invention, a door lock switch includes a switch casing, a slider for making a hook on a door to be held at or released from the switch casing, a locking pin for making the slider locked or unlocked, a bimetal for moving the locking pin to a locking, or unlocking position of the slider, a switch to be closed when the locking pin moves to the locking position of the slider, and a safety lever for opening the switch when the door is opened forcibly.

In another aspect of the present invention, a washing apparatus includes a body forming an exterior of the washing apparatus, an opening in a front surface of the body, a door for opening/closing the opening, a hook on the door, a switch casing on the body in correspondence to the hook on the door, a slider for making the hook on the door being locked or unlocked at the switch casing, a locking pin for locking or unlocking the slider, a

bimetal for making the locking pin to move to a locking position or unlocking position of the slider, a switch to be closed when the locking pin moves to the locking position of the slider, and a safety lever for opening the switch when the door is opened forcibly.

The safety lever has one end rotatably connected to the switch casing, and the
5 other end extended so as to be in contact with the hook of the door, and includes a projection at a position opposite to the locking pin for pressing down the locking pin.

The safety lever further includes a rotation delay portion provided to the other end of the safety lever for delaying rotation of the safety lever so that interference between the slider and the projection is prevented when the door is opened.

10 The washing apparatus further includes a return spring such that the safety lever has a restoring force in a direction the door is opened.

The washing apparatus further includes a heater for making thermal deformation of the bimetal.

The switch includes a fixed contact electrically connected to the electric driving
15 units, and a movable contact electrically connected to a current supply portion for supplying a current to the electric driving units.

The washing apparatus further includes a solenoid for deforming the bimetal to make the locking pin to move to the locking position or the unlocking position of the slider.

The solenoid includes a plunger for deforming the bimetal in reaction to a
20 magnetic field, and a coil wound on the plunger for forming the magnetic field as the current is applied thereto.

In another aspect of the present invention, a method for controlling a washing apparatus includes the step of cutting off a current to electric driving units under operation if a door lock switch which locks or unlocks a door senses forced opening of the door.

In another aspect of the present invention, a method for controlling a washing
5 apparatus having a body forming an exterior thereof, electric driving units provided to the body, an opening in a front surface of the body, a door for opening/closing the opening, a door lock switch for locking/unlocking the door, and a switch in the door lock switch for being closed when the door is locked at the door lock switch to supply a current to the electric driving units, includes the step of the door lock switch sensing forced opening of
10 the door, and opening the switch to cut off the current to the electric driving units under operation when the forced opening of the door is sensed.

In another aspect of the present invention, a method for controlling a washing apparatus having a body forming an exterior thereof, electric driving units provided to the body, a door for opening/closing an opening in the body, a hook on the door, a switch
15 casing on the body in correspondence to the hook on the door, a slider for making the hook on the door to be locked/unlocked at the switch casing, a locking pin for locking/unlocking the slider, a bimetal for moving the locking pin to a locking or unlocking position of the slider, a switch designed to be closed when the locking pin moves to the locking position of the slider, and a safety lever for opening the switch, includes a first step of locking the
20 door to close the switch, a second step of applying a current to the electric driving units as the switch is closed, a third step of opening the door forcibly, to open the switch, and a

fourth step of cutting off the current to the electric driving units as the switch is opened.

The first step includes the step of locking the door to make the locking pin to move to the locking position of the slider by thermal deformation of the bimetal, to close the switch.

5 The thermal deformation of the bimetal is made by heat generated at a heat source, such as a heat.

The third step includes the step of opening the door forcibly, to make the locking pin to move to the unlocking position of the slider by the safety lever to open the switch.

The electric driving units are devices which use electricity as power sources, such
10 as a motor for rotating a drum, or a water supply valve for supplying water to a tub.

In another aspect of the present invention, a method for controlling a washing apparatus having a body forming an exterior thereof, electric driving units provided to the body, a door for opening/closing an opening in the body, a hook on the door, a switch casing on the body in correspondence to the hook on the door, a slider for making the hook
15 on the door to be locked/unlocked at the switch casing, a locking pin for locking/unlocking the slider, a bimetal for moving the locking pin to a locking or unlocking position of the slider, a solenoid for deforming the bimetal to make the locking pin to move to the locking or unlocking position of the slider, a switch designed to be closed when the locking pin moves to the locking position of the slider, and a safety lever for opening the switch,
20 includes a first step of locking the door to close the switch, a second step of applying a current to the electric driving units as the switch is closed, a third step of opening the door

forcibly, to open the switch, and a fourth step of cutting off the current to the electric driving units as the switch is opened.

The first step includes the step of locking the door to make the locking pin to move to the locking position of the slider by thermal deformation of the bimetal and operation of
5 the solenoid, to close the switch.

The thermal deformation of the bimetal is made by heat generated at a heat source, such as a heat, and the solenoid acts toward a direction of the thermal deformation of the bimetal as a current is applied thereto.

The third step includes the step of opening the door forcibly, to make the locking
10 pin to move to the unlocking position of the slider by the safety lever to open the switch.

The electric driving units are devices which use electricity as power sources, such as a motor for rotating a drum, or a water supply valve for supplying water to a tub.

[Advantageous Effects]

According to the door lock switch of a washing apparatus, and method for
15 controlling the same of the present invention, the direct sensing of forced opening of the door with the door lock switch which locks/unlocks the door, and cutting off of a current to the electric driving units under operation with the door lock switch permits a structure of the washing apparatus simple, and to improve operation efficiency and safety of the washing apparatus.

20 Moreover, the simplification of a structure of the washing apparatus for sensing forced open of the door permits to reduce assembly man-hours of the washing apparatus,

as well as a fabrication time period and cost.

Thus, the door lock switch of a washing apparatus, and method for controlling the same of the present invention has very high industrial applicability.

[Description of Drawings]

5 The accompanying drawings, which are included to provide a further understanding of the invention, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings;

FIG. 1 illustrates a perspective view of a related art washing apparatus;

FIG. 2 illustrates a block diagram of a related art washing machine control;

10 FIG. 3 illustrates a perspective view of a door lock switch of a washing apparatus in accordance with a preferred embodiment of the present invention;

FIG. 4 illustrates a section of a door lock switch at the time of unlocking of the door in FIG. 3;

15 FIG. 5 illustrates a section of a door lock switch at the time of locking of the door in FIG. 3;

FIG. 6 illustrates a section of a door lock switch at the time of forced opening of the door in FIG. 3;

FIG. 7 illustrates a section of a door lock switch after forced opening of the door in FIG. 3;

20 FIG. 8 illustrates a flow chart showing the steps of a method for controlling a washing apparatus in accordance with a preferred embodiment of the present invention;

FIG. 9 illustrates a section of a door lock switch in accordance with another preferred embodiment of the present invention at the time of unlocking of the door;

FIG. 10 illustrates a section of a door lock switch in FIG. 9 at the time of locking of the door;

5 FIG. 11 illustrates a section of a door lock switch in FIG. 9 at the time of forced opening of the door;

FIG. 12 illustrates a section of a door lock switch in FIG. 9 after forced opening of the door; and

10 FIG. 13 illustrates a flow chart showing the steps of a method for controlling a washing apparatus in accordance with another preferred embodiment of the present invention.

[Best Mode]

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

FIG. 3 illustrates a perspective view of a door lock switch of a washing apparatus in accordance with a preferred embodiment of the present invention.

Referring to FIG. 3, the door lock switch 50 is mounted at one side of an opening 53 in the body 52 of the washing apparatus, for locking, or unlocking of a hook 55 on a door 54 for opening/closing the opening 53.

It is designed that, when the door 54 is forcibly opened, the door lock switch 50 cuts off a current to electric driving units that use electricity as a power source, such as a motor (not shown) for rotating the drum 56, a water supply valve for supplying water to a tub (not shown), or a drain pump for draining water from the tub.

5 In the meantime, the drum 56 has lifters 57 on an inside circumferential surface of enhancing a washing effect, and the body 52 has a control panel mounted on a rear of a top for controlling the washing apparatus.

A structure of the door lock switch 50 will be described in more detail with reference to FIGS. 4 to 7.

10 FIG. 4 illustrates a section of a door lock switch at the time of unlocking of the door in FIG. 3, FIG. 5 illustrates a section of a door lock switch at the time of locking of the door in FIG. 3, FIG. 6 illustrates a section of a door lock switch at the time of forced opening of the door in FIG. 3, and FIG. 7 illustrates a section of a door lock switch after forced opening of the door in FIG. 3.

15 Referring to FIGS. 4 to 7, the door lock switch 50 includes a switch casing 60, a slider 70, a locking pin 80, a bimetal 90, a switch 100, a safety lever 110, and a return spring 120.

The switch casing 60 is mounted at one side of the opening 53 of the body 52.

The slider 70 is movably mounted in the switch casing 60 such that the hook 55 on
20 the door 54 is held at, or released from the switch casing 60.

The locking pin 80 is provided for locking or unlocking of the slider 70.

The bimetal 90 is provided such that the locking pin 80 moves between a locking position 'L' and an unlocking position 'UL' of the slider 70.

The switch 100 is provided such that the locking pin 80 is come into contact therewith when the locking pin 80 moves to the locking position 'L' of the slider 70.

5 The safety lever 110 is provided such that the locking pin 80 moves for releasing contact of the switch 100 when the door 54 is opened forcibly.

The return spring 120 is provided such that the safety lever 110 has a restoring force in a direction the door 54 is opened.

Components of the door lock switch 50 will be described in more detail.

10 The switch casing 60 is secured to a side of the opening 53 in the body 52 with fastening means, such as fastening bolts. The switch casing 60 has an inserting hole 61 for inserting the hook 55, having a sloped side surface 62 for sliding of the hook 55. The switch casing 60 also has a return spring holding rod 63 for holding one end of the return spring 120. In the switch casing 60, there is a spring 64 which extends when the slider 70
15 moves away by the hook 55, and returns when the hook 55 is drawn from the inserting hole 54. In this instance, the spring 64 has one end held at a step 65 on the switch casing 60, and the other end held at the slider 70. The switch casing 60 has a hinge pin 66 at an opposite side of the inserting hole 61 for hinge connection of the safety lever 110. Moreover, the switch casing 60 has a safety lever retainer 67 projected therefrom for preventing the safety
20 lever from falling off the switch casing 60.

The hook 55 is mounted on the door 54 so as to be rotatable at a predetermined

angle, and is springly supported on a return spring (not shown) in the door 54.

The slider 70 has an inserting hole 71 for inserting the hook 55. The slider 70 has a first projection 72 formed by bending at one side of the inserting hole 71 such that the slider 70 is pushed away by the hook 55. Moreover, the slider 70 has a second projection
5 73 at the other side of the inserting hole 71 for limiting left/right direction movement of the hook 55 when the hook 55 is held from moving in a door opening direction.

The locking pin 80 has upper, and lower holders 81, and 82 for holding a portion of the bimetal 90 placed therebetween.

The bimetal 90 has two metal plates 91, and 92 of different thermal expansive
10 coefficients in close contact with each other. The two metal plates 91, and 92 are designed to be heated by a heater 93 mounted in the switch casing 60. The two metal plates 91, and 92 have one ends fixedly secured to the heater 93 or the switch casing 60, and the other ends held between the upper, and lower holders 81, and 82. The heater 93 may be selected from a variety of heaters, such as a PTC ceramic heater, or a coil heater.

15 The switch 100 includes a fixed contact 101 electrically connected to the electric driving units mounted on the washing apparatus, and a movable contact 102 on the bimetal 90 electrically connected to a current supply portion (not shown) for supplying a current to the electric driving units.

The safety lever 110 has one end rotatably coupled to the switch casing 60, and the
20 other end extended so as to be in contact with the hook 55, and one side having a projection 111 for pressing the locking pin 80. At the other end of the safety lever 110,

there is also a rotation delay portion 112 for delaying rotation of the safety lever 110 when the door 54 starts to open, so that the slider 80 is not held at the projection 111. The rotation delay portion 112 includes a sloped portion 112a a head portion 55a of the hook 55 is to slide thereon, and a stepped portion 112b extended from the sloped portion 112a so as to be stepped from other portions of the safety lever. The safety lever 110 has a hinge hole portion 113 at one end thereof having the hinge pin 66 of the switch casing 80 rotatably inserted therein. the safety lever 110 also has a return spring holding rod portion 114 for holding the other end of the return spring 120. The safety lever 110 has a holding hole 116 for holding the safety lever retainer 67 for limiting excessive rotation of the safety lever 110.

The operation of the door lock switch of a washing apparatus of the present invention will be described.

When the door 54 is rotated to close the opening 53 after laundry is introduced into the drum 56, the head portion 55a of the hook 55 passes through the inserting hole 61 in the switch casing 60, and the inserting hole 71 in the slider 70 in succession. As shown in FIG. 5, as the hook 55 passes through, the hook 55 makes the first projection 72 on the slider 70 to slide in a lateral direction, and pushes the safety lever 110 in a closing direction of the door 54, making the safety lever 110 rotates by a predetermined angle around the hinge pin 66.

Then, the slider 70 slides in a lateral direction by the hook 55, and extends the spring 64, such that the second projection 73 of the slider 70 reaches to a position at which,

as shown in FIG. 5, the second projection 73 limits left/right direction movement of the hook 55, and the head portion 55a of the hook 55 is held at a side of the inserting hole 61 of the switching casing 60 from an opening direction of the door 54.

Then, when the user puts the washing apparatus into operation in a state the door 54 is locked thus, the washing apparatus locks the door 54, and senses the forced opening of the door 54, to cut a current to the electric driving units when the door 54 is opened forcibly.

FIG. 8 illustrates a flow chart showing the steps of a method for controlling a washing apparatus in accordance with a preferred embodiment of the present invention having the door lock switch applied thereto.

Referring to FIG. 8, the method includes a first step for locking a door 54 to close a switch 100, a second step for applying a current to electric driving units as the switch 100 is closed, a third step for opening the switch 100 as the door 54 is opened forcibly, and a fourth step for cutting off the current applied to the electric driving units as the switch 100 is opened.

In the first step, as the bimetal 90 deforms by heat following locking of the door 54, the locking pin 80 moves to a locking position 'L' of the slider 70 to close the switch 100.

The bimetal 90 is thermally deformed by the heat from the heater 93.

In the third step, as the door 54 is opened forcibly, the locking pin 80 is moved to the unlocking position 'UL' of the slider 70 by the safety lever 110 to open the switch 100.

The foregoing will be described in more detail.

When the user puts the washing apparatus into operation, the current is applied to the heater 93 to lock the door 54 (S1, and S2).

The heater 93 generates heat to heat the bimetal 90 when the current is applied thereto, and, as shown in FIG. 5, the bimetal 90 bends in a direction of a metal having a lower thermal expansive coefficient by a difference of thermal expansion of the two metal 91, and 92, when the movable contact 102 is brought into contact with the fixed contact 101, to close the switch 100.

When the switch 100 is closed, the current is applied to the motor, the water supply valve, or the drain unit of the washing apparatus (S3).

Referring to FIG. 5, while the bimetal 90 bends, the bimetal 90 makes the locking pin 80 to move to the slider locking position 'L', so that the slider 70 is held by the locking pin 80 at a position where the second projection 73 limits left/right direction movement of the hook 55 when the slider 70 is going to return to an original position, thereby maintaining the holding of the hook 55 and the locking of the door 54.

The washing apparatus proceeds various cycles of washing, rinsing, spinning, and drying applied by the user as the electric driving units are operated in a state the door 54 is locked.

Referring to FIG. 6, if the door 54 is pulled forward strongly in the middle of proceeding of above cycles, the hook 55 moves in a door open direction together with the door 54, such that the head portion 55a slides on the sloped portion 112a of the rotation

delay portion 112 while the head portion 55a pushes the second projection 73 of the slider 70 in a direction opposite to a direction in a case the hook 55 is inserted until the head portion 55a is brought into contact with the stepped portion 112b.

Referring to FIG. 7, if the door 54 is kept pulled, the head portion 55a is drawn out
5 of the inserting hole 71 in the slider 70, and the inserting hole 61 in the switch casing 60 in succession.

In this instance, the safety lever 110 is moved in the door open direction by compression of the return spring 120, the projection 111 presses down the locking pin 80 to make the locking pin 80 to move forward, the locking pin 80 deforms the bimetal 90 to a
10 shape before the bimetal 90 is expanded (i.e., a shape not thermally expanded), when the contact between the fixed contact 101 and the movable contact 102 is broken, to make the switch 100 open (S4).

Once the switch 100 is opened, the current to the electric driving units of the washing apparatus is cut off, to stop operation of the electric driving units (S5).

15 Then, referring to FIG. 5, if the door 54 is rotated to close the opening 53, the head portion 55a of the hook 55 makes the first projection 72 of the slider 70 to slide in a lateral direction, until the second projection 73 limits the left/right direction movement of the hook 55. Then, the head portion 55a of the hook 55 pushes the safety lever 110 in a door close direction, such that the head portion 55a is held at an edge of the inserting hole 61 of
20 the switch casing from a door open direction while the head portion 55a make to the safety lever 110 to rotate at a predetermined angle around the hinge pin 66.

At the time of rotation of the safety lever 110, the locking pin 80 pressed down by the projection 111 moves to a locking position 'L' of the slider 70 again by bending coming from thermal expansion of the bimetal 90, and the fixed contact 101 and the movable contact 102 are brought into contact again by the bending coming from thermal expansion of the bimetal 90, thereby closing the switch 100. Accordingly, the electric driving units of the washing apparatus become a state when the electric driving units are possible to receive the current from the current supply portion.

Then, when the user puts the washing machine into operation again, the electric driving units are operated again, to proceed a series of cycles of the washing, rinsing, spinning, and drying. When all the cycles entered by the user are finished, the heater 93 is turned off.

If the heater 93 is turned off, the bimetal 90 is cooled down and restores a shape before the thermal expansion (i.e., a shape not thermally expanded), the contact between the fixed contact 101 and the movable contact 102 is broken, to apply the current to the electric driving units no more, and the locking pin 80 moves to the unlocking position of the slider 70 by the bimetal 90.

If the user pulls the door 54 forward again for taking out the laundry, the head portion 55a of the hook 55 slides on the sloped portion 112a of the rotation delay portion 112 while the head portion 55a pushes the second projection 73 of the slider 70 in a direction opposite to a direction in a case the hook 55 is inserted until the head portion 55a is brought into contact with the stepped portion 112b, and is drawn out of the inserting hole

71 in the slider 70 and the inserting hole 61 in the switch casing 60, in succession.

Another embodiment of the present invention will be described with reference to FIGS. 9 to 12.

FIG. 9 illustrates a section of a door lock switch in accordance with another preferred embodiment of the present invention at the time of unlocking of the door, FIG. 10 illustrates a section of a door lock switch in FIG. 9 at the time of locking of the door, FIG. 11 illustrates a section of a door lock switch in FIG. 9 at the time of forced opening of the door, FIG. 12 illustrates a section of a door lock switch in FIG. 9 after forced opening of the door, and FIG. 13 illustrates a flow chart showing the steps of a method for controlling a washing apparatus in accordance with another preferred embodiment of the present invention.

Referring to FIGS. 9 to 12, the door lock switch 50 further includes a solenoid 130 for deforming the bimetal to move the locking pin 80 between the locking position of the slider 70 and the unlocking position UL of the slider 70. Since other systems and operation except the solenoid are identical to the door lock switch in FIGS. 4 to 7, the same reference symbols will be used, and detailed description of which will be omitted.

The solenoid 130 includes a plunger 132 for deforming the bimetal 90 in response to a magnetic field, and a helical coil 131 wound on an outside surface of the plunger 132 for forming the magnetic field as a current is applied thereto.

That is, referring to FIG. 10, the door lock switch 50 makes the fixed contact 101 and the movable contact 102 to be brought into contact more quickly and more positively

by applying a current to the coil 131 on the solenoid 130 when a current is applied to the heater 93, to make the plunger 132 to move forward, to bend one side of the bimetal 90 toward the fixed contact 101.

Referring to FIG. 12, when the locking pin 80 is forcibly pressed down by the projection 111 of the safety lever 110, the door lock switch 50 enables cutting off of the current by the safety lever 110 as the plunger 132 of the solenoid 130 is pressed down together with the bimetal 90.

In the meantime, FIG. 13 illustrates a flow chart showing the steps of a method for controlling a washing apparatus in accordance with another preferred embodiment of the present invention, having the door lock switch 50 in FIGS. 9 to 12 applied thereto.

Alike the foregoing control method, the method includes a first step for locking a door 54 to close a switch 100, a second step for applying a current to electric driving units as the switch 100 is closed, a third step for opening the switch 100 as the door 54 is opened forcibly, and a fourth step for cutting off the current applied to the electric driving units as the switch 100 is opened.

However, the first step in the method for controlling a washing apparatus in accordance with another embodiment of the present invention is different in closing the switch 100 by moving the locking pin 80 following the locking of the door 54.

That is, when the locking pin 80 is moved, not only the thermal deformation of the bimetal 90, but also the solenoid is used, for quicker closing of the switch 100.

The foregoing will be described in more detail.

When the user puts the washing apparatus into operation, the current is applied to the heater 93 and the solenoid 130 to lock the door 54 (S11, and S12).

The heater 93 generates heat to heat the bimetal 90 when the current is applied thereto, and, as shown in FIG. 10, the bimetal 90 bends in a direction of a metal having a lower thermal expansive coefficient by a difference of thermal expansion of the two metal 91, and 92, when the movable contact 102 is brought into contact with the fixed contact 101, to close the switch 100.

On the other hand, the solenoid 130 makes the fixed contact 101 and the movable contact 102 to come into quicker and more positive contact to each other as the plunger 132 moves forward to bend one side of the bimetal 90 toward the fixed contact 101.

When the switch 100 is closed, the current is applied to the motor, the water supply valve, or the drain unit of the washing apparatus (S13).

Referring to FIG. 12, while the bimetal 90 bends, the bimetal 90 makes the locking pin 80 to move to the slider locking position 'L', so that the slider 70 is held by the locking pin 80 at a position where the second projection 73 limits left/right direction movement of the hook 55 when the slider 70 is going to return to an original position, thereby maintaining the holding of the hook 55 and the locking of the door 54.

The washing apparatus proceeds various cycles of washing, rinsing, spinning, and drying applied by the user as the electric driving units are operated in a state the door 54 is locked.

Referring to FIG. 12, if the door 54 is pulled forward strongly in the middle of

proceeding of above cycles, the head portion 55a of the hook 55 is drawn out of the inserting hole 71 in the slider 70, and the inserting hole 61 in the switch casing 60 in succession. In this instance, the safety lever 110 rotates in a door open direction to move the locking pin 80 forward through the projection 111, and the locking pin 80 deforms the
5 bimetal 90 to a shape before the bimetal 90 is expanded (i.e., a shape not thermally expanded), when the contact between the fixed contact 101 and the movable contact 102 is broken, to make the switch 100 open (S14).

Once the switch 100 is opened, the current to the electric driving units of the washing apparatus is cut off, to stop operation of the electric driving units (S15).

10 As the operation hereafter is the same with the control method in FIG. 8, detailed description of which will be omitted.

Even though the door lock switch of a washing apparatus of the present invention has been described with reference to the attached drawings, it is apparent that the present invention is not limited to the embodiments and the drawings, but the present invention is
15 applicable even to drying apparatus and dishwasher other than the washing apparatus.

[Industrial Applicability]

According to the door lock switch of a washing apparatus, and method for controlling the same of the present invention, the direct sensing of forced opening of the door with the door lock switch which locks/unlocks the door, and cutting off of a current to
20 the electric driving units under operation with the door lock switch permits a structure of the washing apparatus simple, and to improve operation efficiency and safety of the

washing apparatus.

Moreover, the simplification of a structure of the washing apparatus for sensing forced open of the door permits to reduce assembly man-hours of the washing apparatus, as well as a fabrication time period and cost.

- 5 Thus, the door lock switch of a washing apparatus, and method for controlling the same of the present invention has very high industrial applicability.

[CLAIMS]

[Claim 1] A door lock switch for locking or unlocking a door, and cutting off a current applied to electric driving units under operation when the door is opened forcibly.

5 [Claim 2] A door lock switch comprising:

a switch casing;

a slider for making a hook on a door to be held at or released from the switch casing;

a locking pin for making the slider locked or unlocked;

10 a bimetal for moving the locking pin to a locking, or unlocking position of the slider;

a switch to be closed when the locking pin moves to the locking position of the slider; and

a safety lever for opening the switch when the door is opened forcibly.

15

[Claim 3] The door lock switch as claimed in claim 2, wherein the safety lever has one end rotatably connected to the switch casing, and the other end extended so as to be in contact with the hook of the door, and includes a projection at a position opposite to the locking pin for pressing down the locking pin.

20

[Claim 4] The door lock switch as claimed in claim 3, wherein the safety lever

further includes a rotation delay portion provided to the other end of the safety lever for delaying rotation of the safety lever so that interference between the slider and the projection is prevented when the door is opened.

5 [Claim 5] The door lock switch as claimed in claim 2, further comprising a return spring such that the safety lever has a restoring force in a direction the door is opened.

 [Claim 6] The door lock switch as claimed in claim 2; further comprising a heater for making thermal deformation of the bimetal.

10

 [Claim 7] The door lock switch as claimed in claim 2, wherein the switch includes;
a fixed contact electrically connected to the electric driving units, and
a movable contact electrically connected to a current supply portion for supplying
a current to the electric driving units.

15

 [Claim 8] The door lock switch as claimed in claim 7, wherein the electric driving units are provided to an apparatus provided with the door lock switch, and units that use electricity as a power source.

20

 [Claim 9] The door lock switch as claimed in claim 2, further comprising a solenoid for deforming the bimetal to make the locking pin to move to the locking position

or the unlocking position of the slider.

[Claim 10] The door lock switch as claimed in claim 9, wherein the solenoid includes;

- 5 a plunger for deforming the bimetal in reaction to a magnetic field, and
 a coil wound on the plunger for forming the magnetic field as the current is
applied thereto.

[Claim 11] A washing apparatus comprising:

- 10 a body forming an exterior of the washing apparatus;
 an opening in a front surface of the body;
 a door for opening/closing the opening;
 a hook on the door;
 a switch casing on the body in correspondence to the hook on the door;
15 a slider for making the hook on the door being locked or unlocked at the switch
casing;
 a locking pin for locking or unlocking the slider;
 a bimetal for making the locking pin to move to a locking position or unlocking
position of the slider;
20 a switch to be closed when the locking pin moves to the locking position of the
slider; and

a safety lever for opening the switch when the door is opened forcibly.

[Claim 12] The washing apparatus as claimed in claim 11, wherein the safety lever has one end rotatably connected to the switch casing, and the other end extended so as to
5 be in contact with the hook of the door, and includes a projection at a position opposite to the locking pin for pressing down the locking pin.

[Claim 13] The washing apparatus as claimed in claim 12, wherein the safety lever further includes a rotation delay portion provided to the other end of the safety lever for
10 delaying rotation of the safety lever so that interference between the slider and the projection is prevented when the door is opened.

[Claim 14] The washing apparatus as claimed in claim 11, further comprising a return spring such that the safety lever has a restoring force in a direction the door is
15 opened.

[Claim 15] The washing apparatus as claimed in claim 6, further comprising a heater for making thermal deformation of the bimetal.

20 [Claim 16] The washing apparatus as claimed in claim 11, wherein the switch includes;

a fixed contact electrically connected to the electric driving units, and
a movable contact electrically connected to a current supply portion for supplying
a current to the electric driving units.

5 [Claim 17] The washing apparatus as claimed in claim 11, further comprising a
solenoid for deforming the bimetal to make the locking pin to move to the locking position
or the unlocking position of the slider.

 [Claim 18] The washing apparatus as claimed in claim 17, wherein the solenoid
10 includes;

a plunger for deforming the bimetal in reaction to a magnetic field, and
a coil wound on the plunger for forming the magnetic field as the current is
applied thereto.

15 [Claim 19] A method for controlling a washing apparatus comprising the step of
cutting off a current to electric driving units under operation if a door lock switch which
locks or unlocks a door senses forced opening of the door.

 [Claim 20] A method for controlling a washing apparatus having a body forming
20 an exterior thereof, electric driving units provided to the body, an opening in a front
surface of the body, a door for opening/closing the opening, a door lock switch for

locking/unlocking the door, and a switch in the door lock switch for being closed when the door is locked at the door lock switch to supply a current to the electric driving units, comprising the step of:

- the door lock switch sensing forced opening of the door; and
- 5 opening the switch to cut off the current to the electric driving units under operation when the forced opening of the door is sensed.

[Claim 21] A method for controlling a washing apparatus having a body forming an exterior thereof, electric driving units provided to the body, a door for opening/closing an opening in the body, a hook on the door, a switch casing on the body in correspondence

10 to the hook on the door, a slider for making the hook on the door to be locked/unlocked at the switch casing, a locking pin for locking/unlocking the slider, a bimetal for moving the locking pin to a locking or unlocking position of the slider, a switch designed to be closed when the locking pin moves to the locking position of the slider, and a safety lever for

15 opening the switch, comprising:

- a first step of locking the door to close the switch;
- a second step of applying a current to the electric driving units as the switch is closed;
- a third step of opening the door forcibly, to open the switch; and
- 20 a fourth step of cutting off the current to the electric driving units as the switch is opened.

[Claim 22] The method as claimed in claim 21, wherein the first step includes the step of locking the door to make the locking pin to move to the locking position of the slider by thermal deformation of the bimetal, to close the switch.

5

[Claim 23] The method as claimed in claim 22, wherein the thermal deformation of the bimetal is made by heat generated at a heat source, such as a heat.

[Claim 24] The method as claimed in claim 21, wherein the third step includes the
10 step of opening the door forcibly, to make the locking pin to move to the unlocking position of the slider by the safety lever to open the switch.

[Claim 25] The method as claimed in claim 21, wherein the electric driving units are devices which use electricity as power sources, such as a motor for rotating a drum, or
15 a water supply valve for supplying water to a tub.

[Claim 26] A method for controlling a washing apparatus having a body forming an exterior thereof, electric driving units provided to the body, a door for opening/closing an opening in the body, a hook on the door, a switch casing on the body in correspondence
20 to the hook on the door, a slider for making the hook on the door to be locked/unlocked at the switch casing, a locking pin for locking/unlocking the slider, a bimetal for moving the

locking pin to a locking or unlocking position of the slider, a solenoid for deforming the bimetal to make the locking pin to move to the locking or unlocking position of the slider, a switch designed to be closed when the locking pin moves to the locking position of the slider, and a safety lever for opening the switch, comprising:

- 5 a first step of locking the door to close the switch;
- a second step of applying a current to the electric driving units as the switch is closed;
- a third step of opening the door forcibly, to open the switch; and
- a fourth step of cutting off the current to the electric driving units as the switch is
- 10 opened.

[Claim 27] The method as claimed in claim 26, wherein the first step includes the step of locking the door to make the locking pin to move to the locking position of the slider by thermal deformation of the bimetal and operation of the solenoid, to close the

15 switch.

[Claim 28] The method as claimed in claim 27, wherein the thermal deformation of the bimetal is made by heat generated at a heat source, such as a heat, and the solenoid acts toward a direction of the thermal deformation of the bimetal as a current is applied


20 thereto.

[Claim 29] The method as claimed in claim 26, wherein the third step includes the step of opening the door forcibly, to make the locking pin to move to the unlocking position of the slider by the safety lever to open the switch.

- 5 [Claim 30] The method as claimed in claim 26, wherein the electric driving units are devices which use electricity as power sources, such as a motor for rotating a drum, or a water supply valve for supplying water to a tub.


1/13

FIG. 1

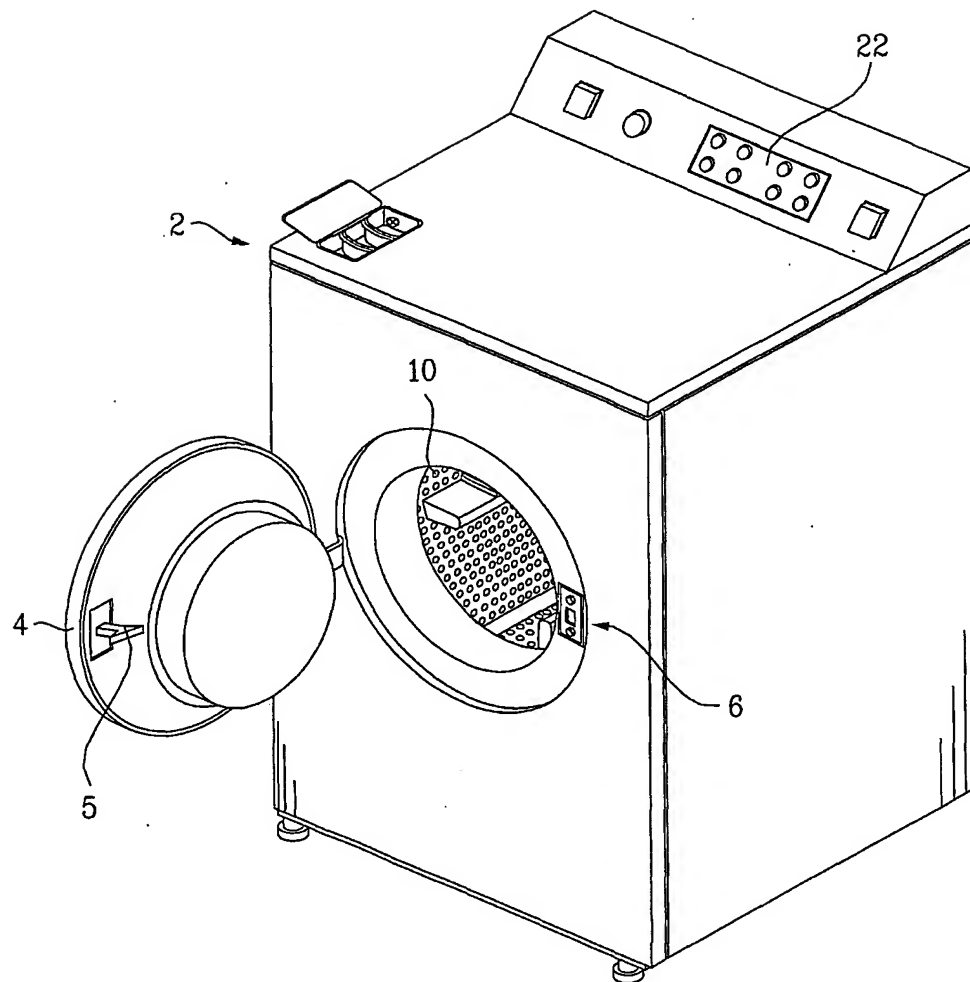

2/13

FIG. 2

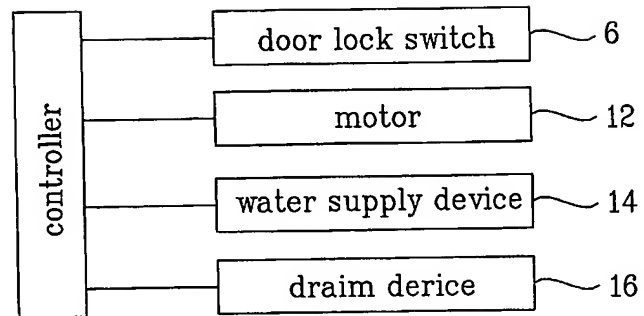

3/13

FIG. 3

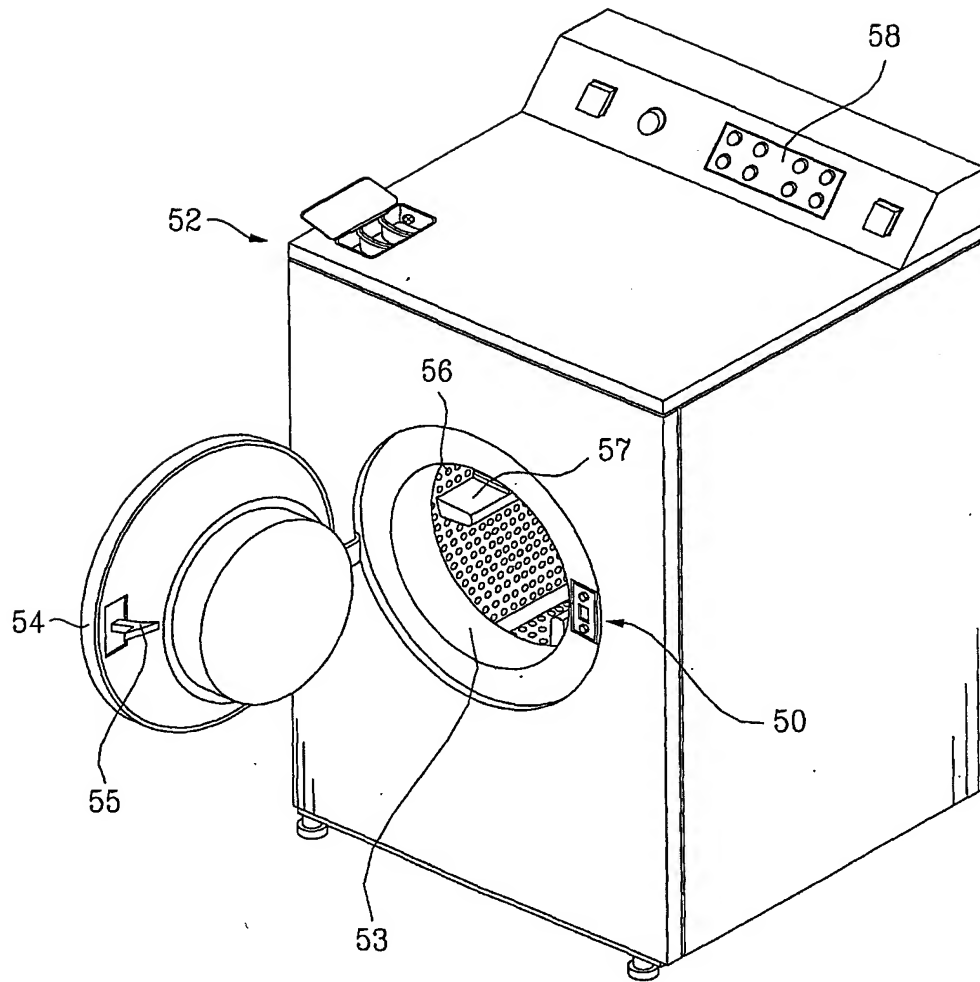


FIG. 4

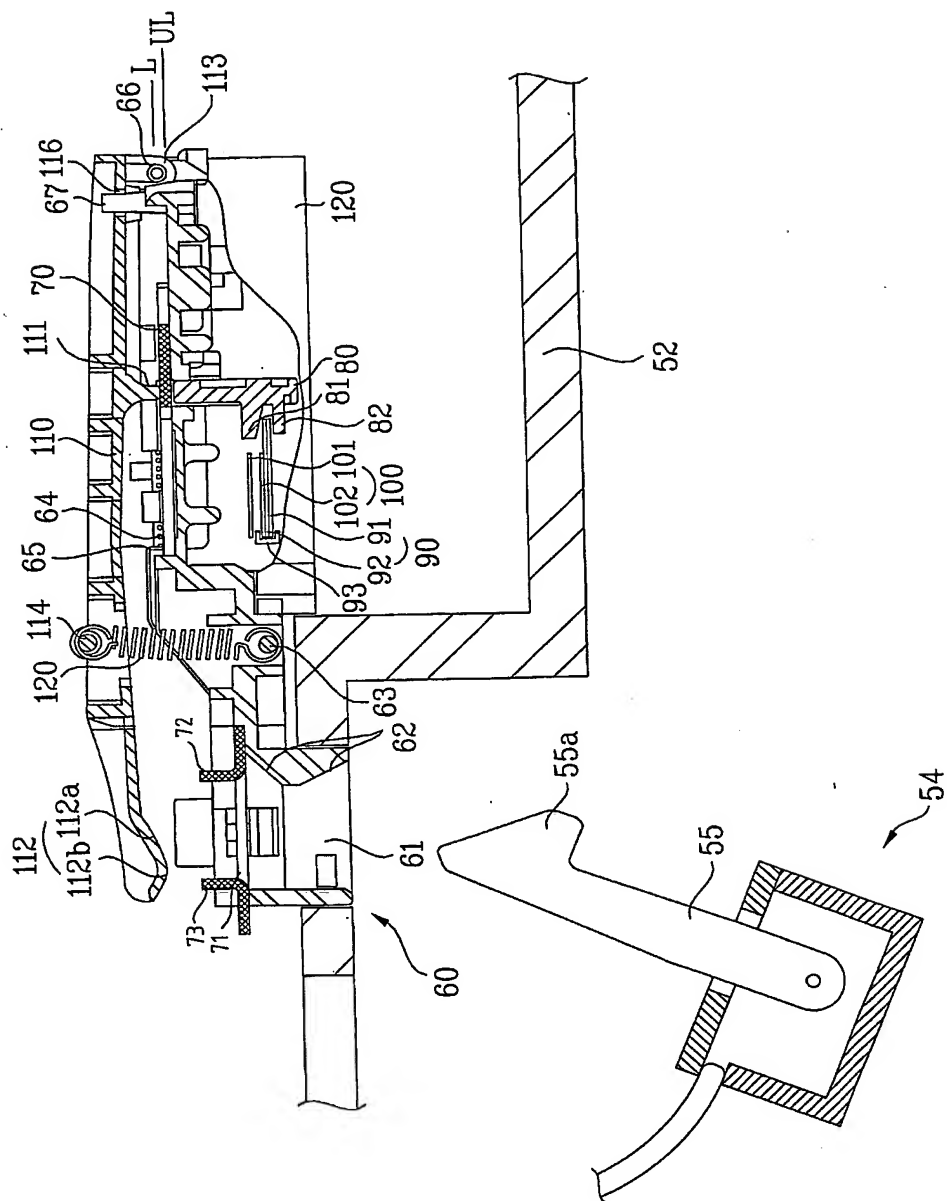


FIG. 5

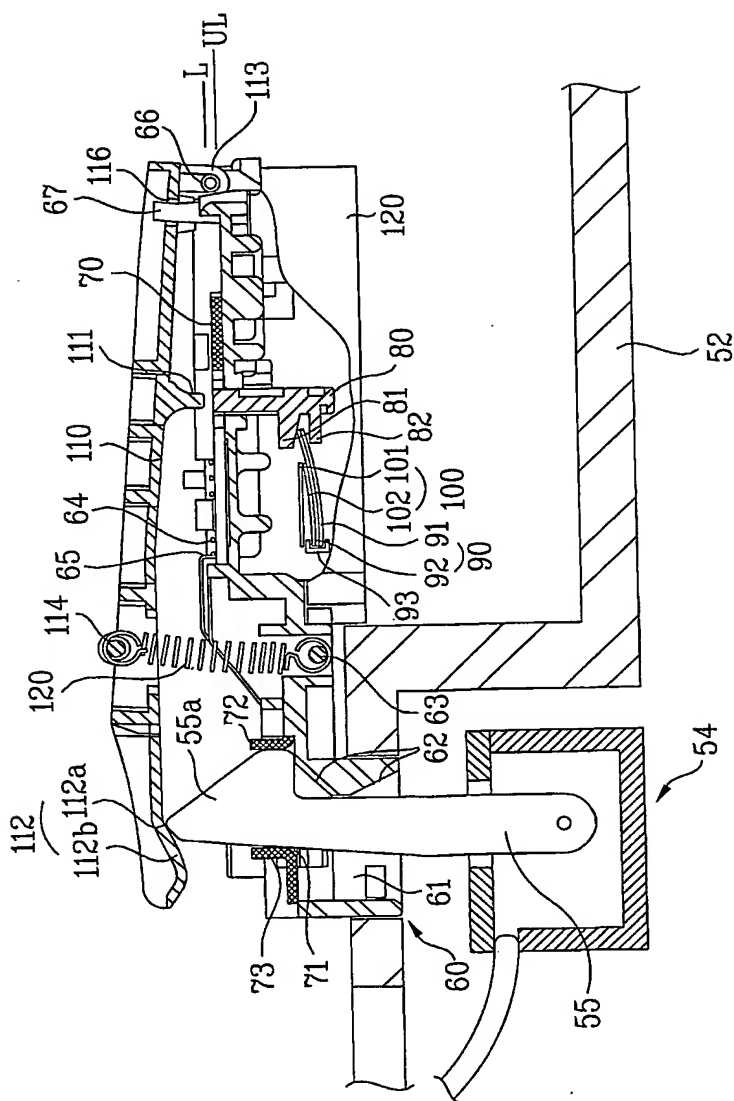


FIG. 6


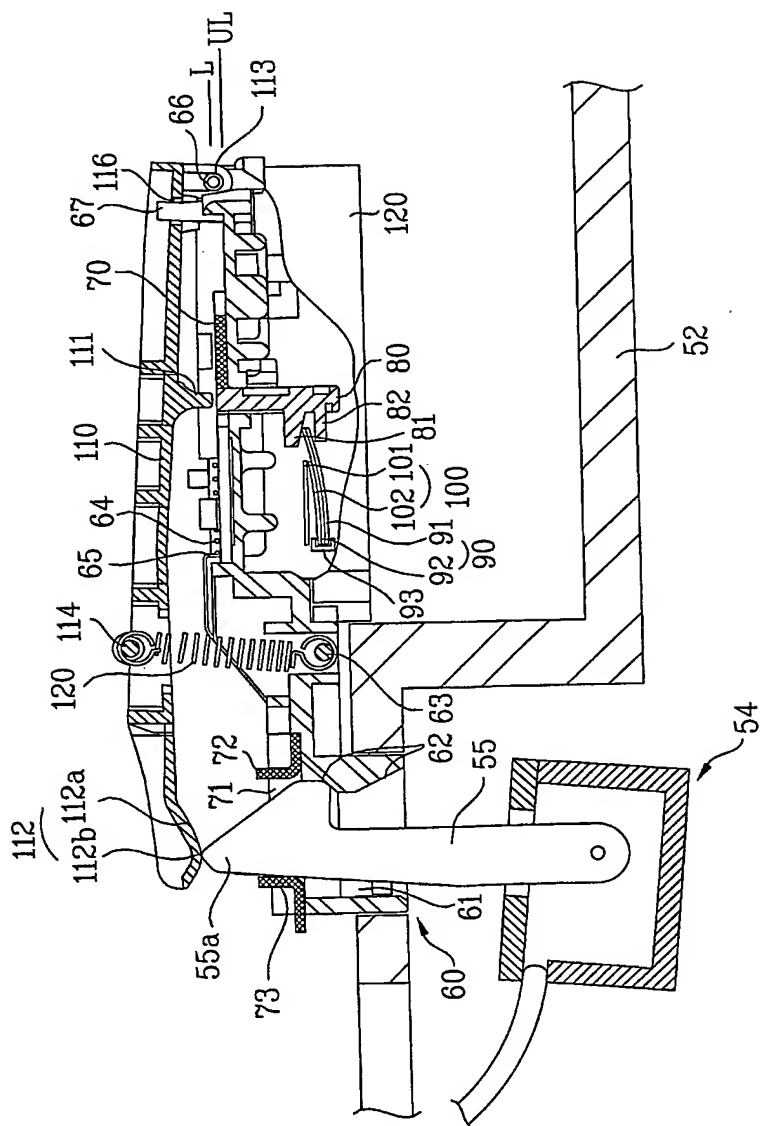


FIG. 7

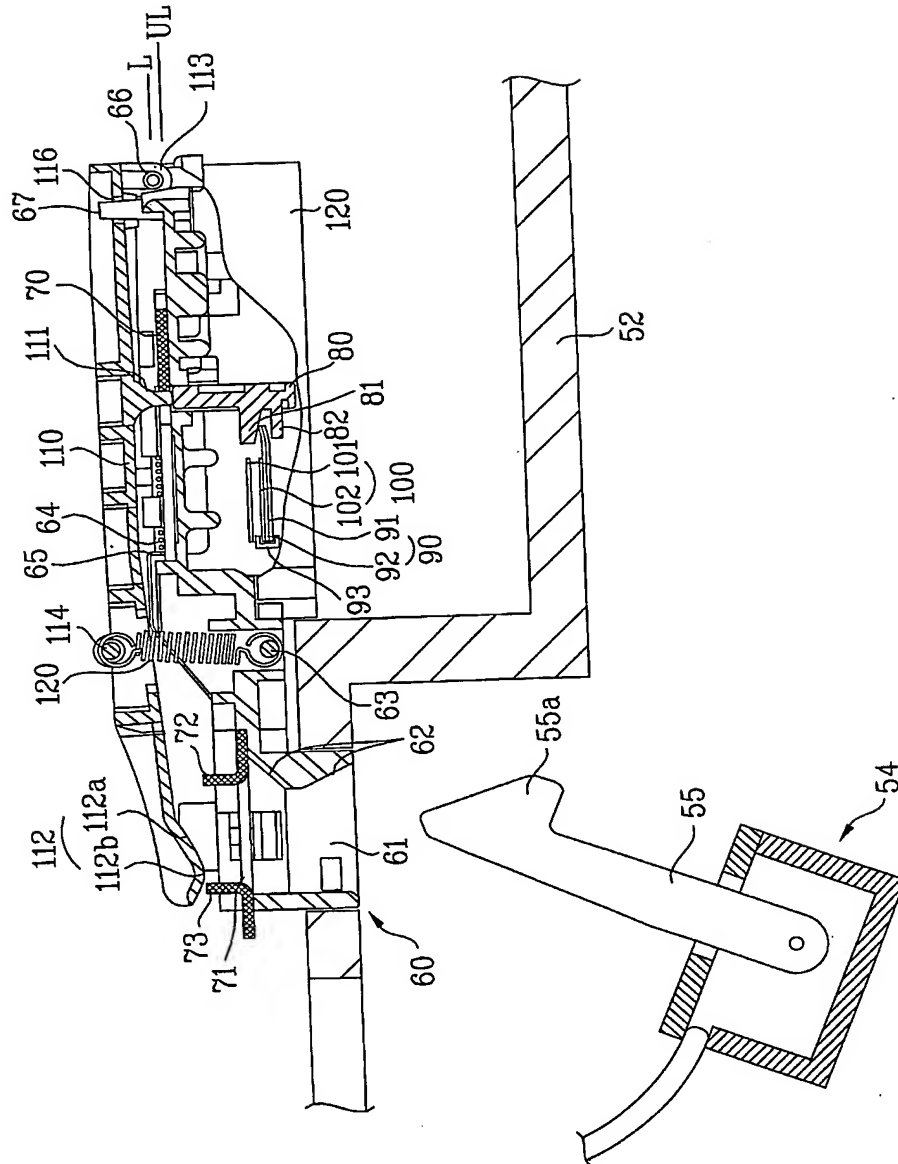

8/13

FIG. 8

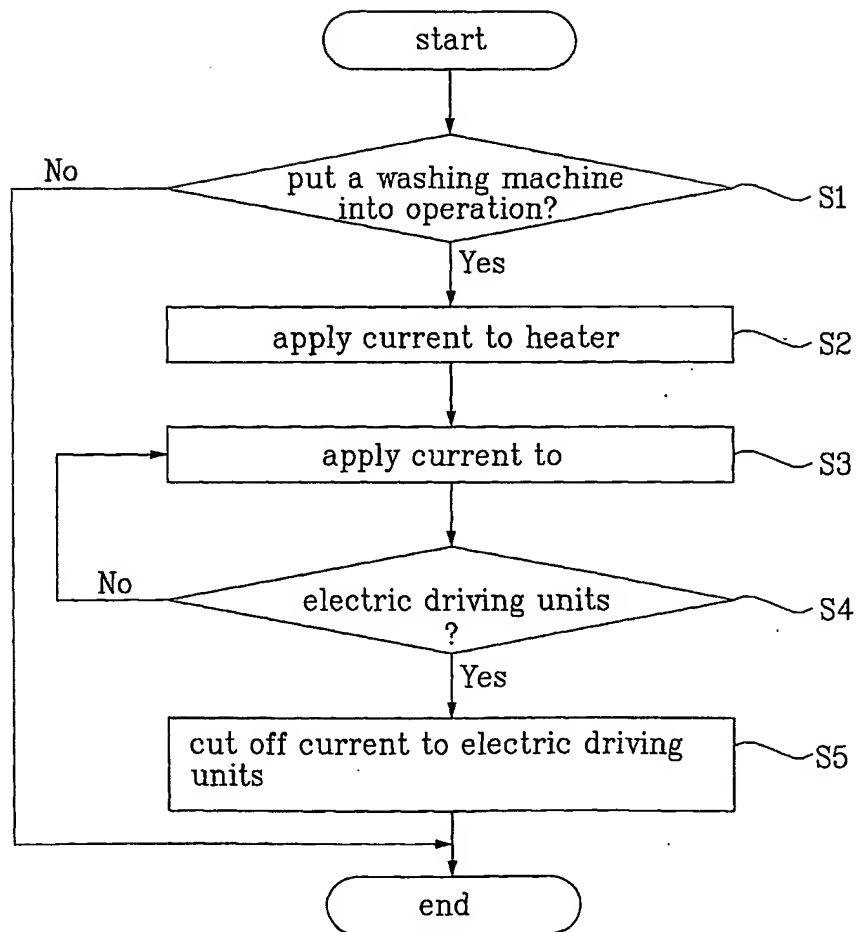


FIG. 10

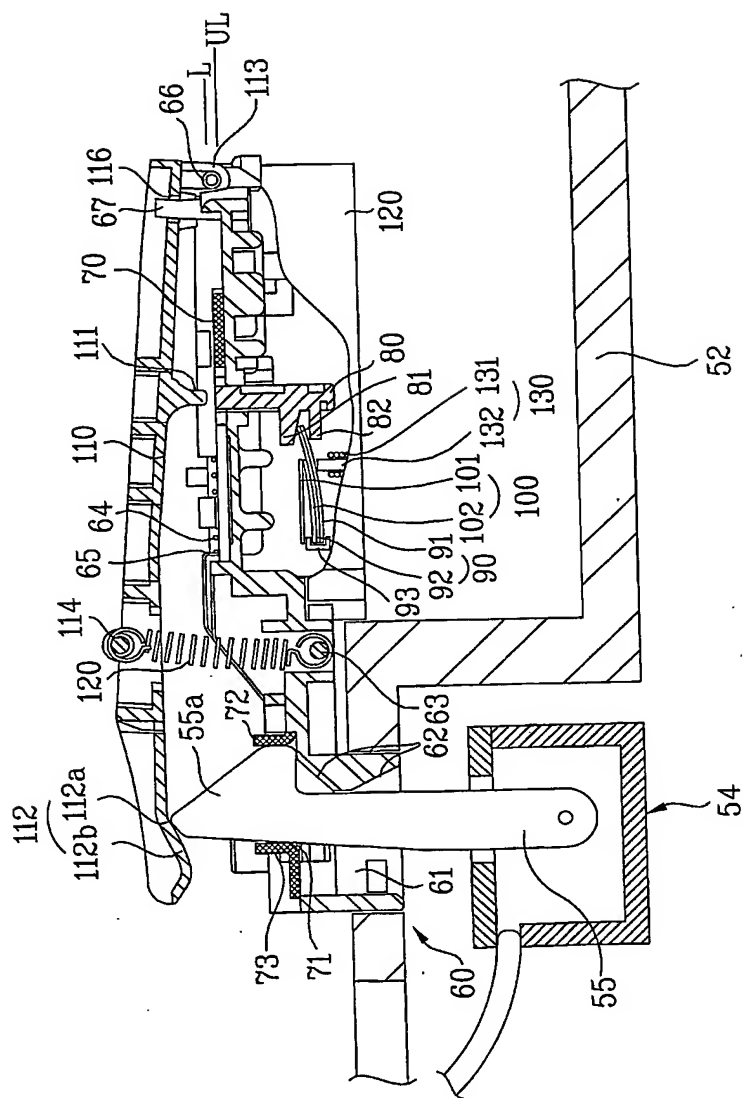


FIG. 11



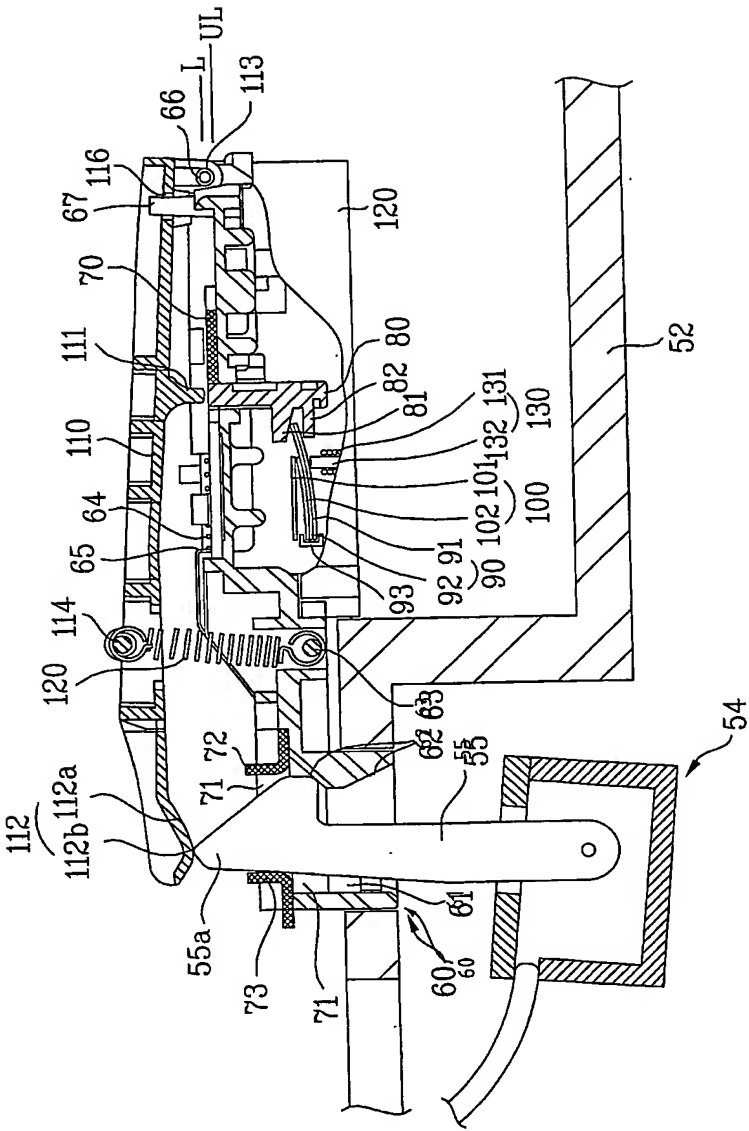


FIG. 12

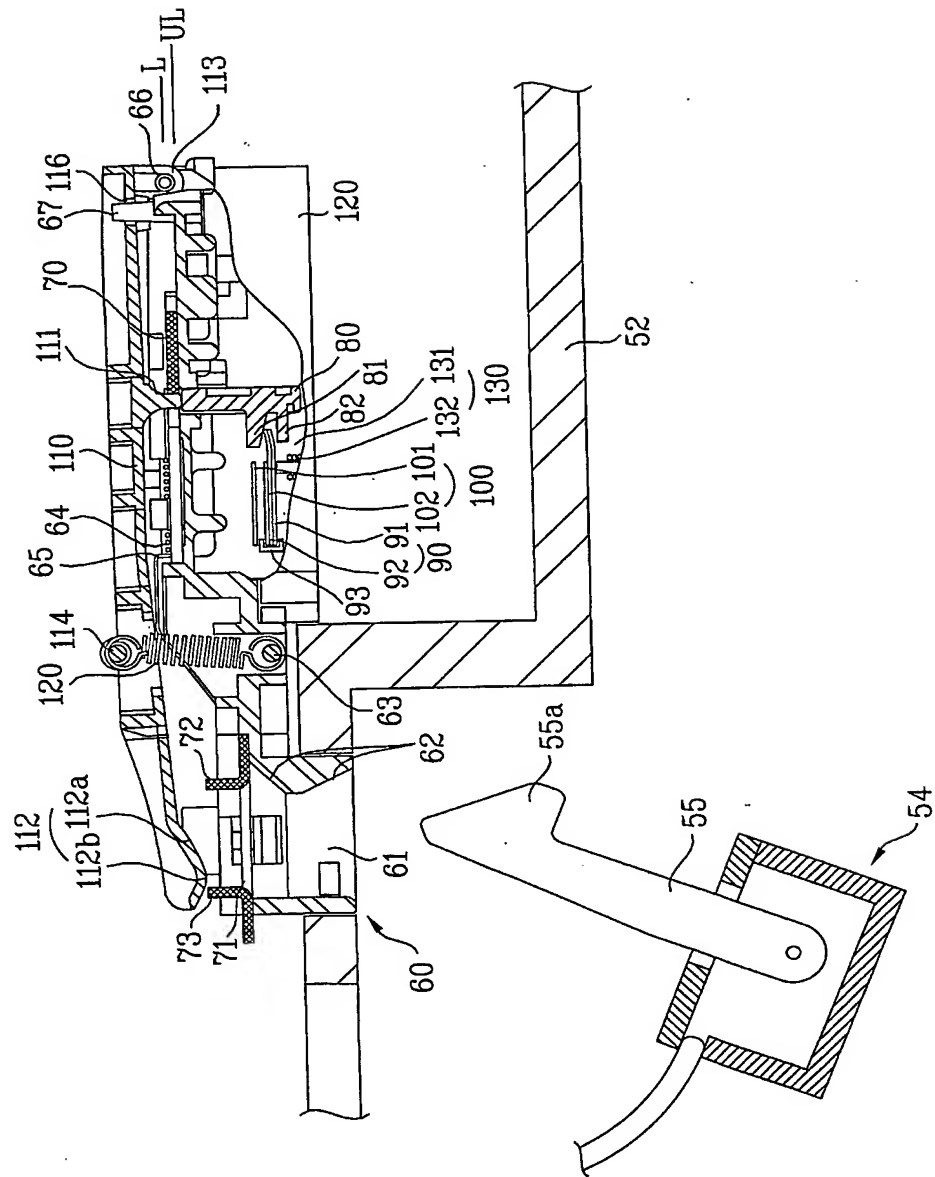

13/13

FIG. 13

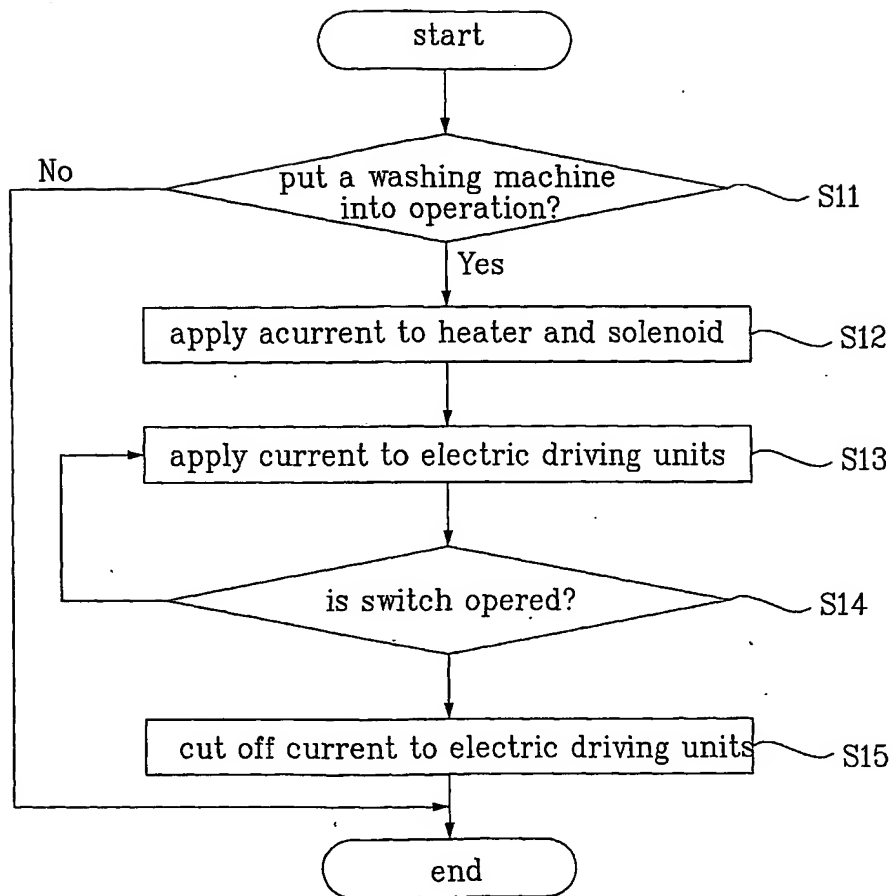

INTERNATIONAL SEARCH REPORT

International application No.
PCT/KR 2005/001431

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁷: D06F 37/28, D06F 39/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁷: D06FDocumentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, WPI, PAJ, TXTn

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 074 545 A (CASE) 21 February 1978 (21.02.1978) <i>figures 1-5, column 2, line 28 - column 3, line 26.</i>	1, 19, 20
Y	---	2, 5-8, 11, 15, 16, 21-25
Y	GB 2 015 070 A (OFFICINE MECCANOPLASTICHE) 5 September 1979 (05.09.1979) <i>figures 1, 2, page 1, line 101 - page 2, line 39.</i>	2, 5-8, 11, 15, 16, 21-25
A	GB 2 128 283 A (TEXAS INSTRUMENTS ITALIA SPA) 26 April 1984 (26.04.1984) <i>figures 1, 2, abstract.</i>	2, 5-8, 11, 15, 16, 21-25

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
11 July 2005 (11.07.2005)Date of mailing of the international search report
29 July 2005 (29.07.2005)Name and mailing address of the ISA/ AT
Austrian Patent Office
Dresdner Straße 87, A-1200 ViennaAuthorized officer
WININGER B.

Facsimile No. +43 / 1 / 534 24 / 535

Telephone No. +43 / 1 / 534 24 / 460

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 2005/001431

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
GB	A	2015070	1979-09-05	FR	A1	2418321	1979-09-21
				ES	A1	478057	1980-03-01
				DE	A1	2907201	1979-09-20
				IT	B	1162081	1987-03-18
GB	A	2128283	1984-04-26	DE	U1	8328449U	1984-03-01
				DE	A1	3335934	1984-04-05
				FR	A1	2533963	1984-04-06
US	A	4074545	1978-02-21	ZA	A	7703395	1978-04-26
				GB	A	1547717	1979-06-27
				AU	A	2545077	1978-11-30
				AU	B2	507243	1980-02-07
				CA	A1	1064072	1979-10-09